


5. Engine Control Module (ECM) I/O Signal

A: ELECTRICAL SPECIFICATION

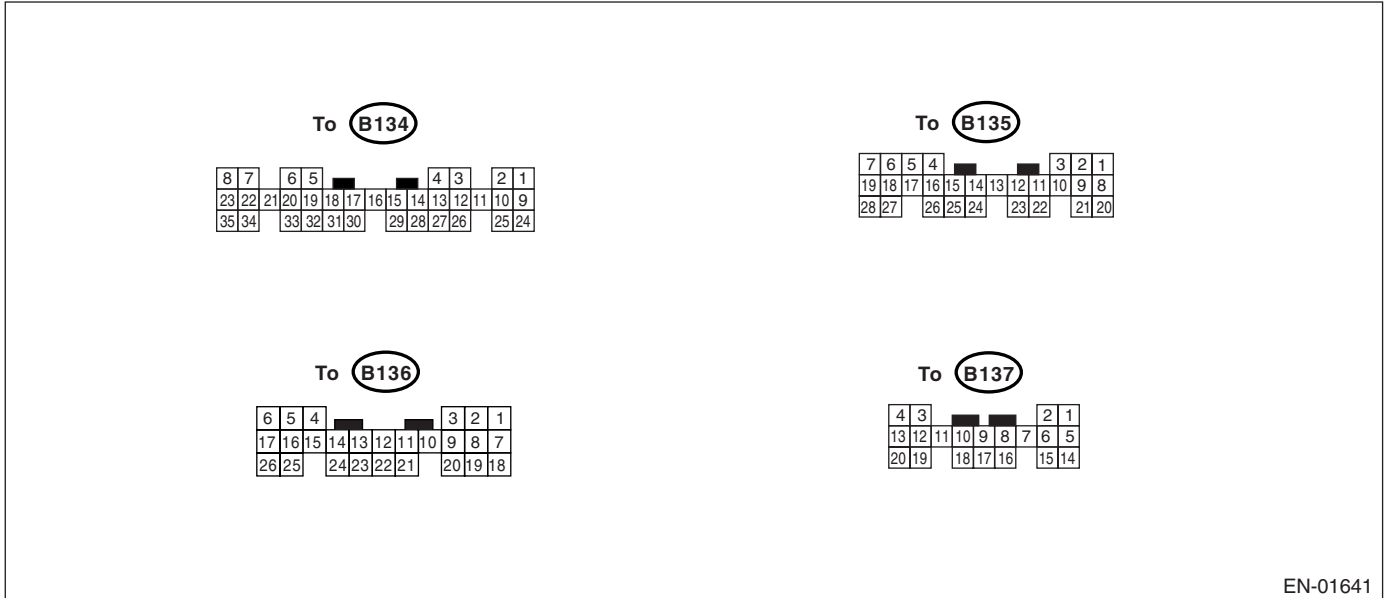

EN-01641

Content	Con- nector No.	Terminal No.	Signal (V)		Note	
			Ignition SW ON (Engine OFF)	Engine ON (Idling)		
Crank- shaft posi- tion sensor	Signal (+)	B135	7	0	-7 to +7	Sensor output waveform
	Signal (-)	B135	17	0	0	—
	Shield	B135	28	0	0	—
Camshaft position sensor	Signal (+)	B135	6	0	-7 to +7	Sensor output waveform
	Signal (-)	B135	18	0	0	—
	Shield	B135	28	0	0	—
Throttle position sensor	Signal	B135	13	Fully closed: 0.2 — 1.0 Fully opened: 4.2 — 4.7		—
	Power supply	B135	3	5	5	—
	GND (sensor)	B135	19	0	0	—
Rear oxy- gen sen- sor	Signal	B135	14	0	0 — 0.9	—
	Shield	B137	15	0	0	—
	GND (sensor)	B135	19	0	0	—
Front oxy- gen (A/F) sensor heater	Signal 1	B136	6	0 — 1.0	0 — 1.0	—
	Signal 2	B136	17	0 — 1.0	0 — 1.0	—
Rear oxygen sensor heater signal		B136	4	0 — 1.0	0 — 1.0	—
Engine coolant tempera- ture sen- sor	Signal	B135	12	1.0 — 1.4	1.0 — 1.4	After warm-up the engine.
	GND (sensor)	B135	19	0	0	After warm-up the engine.
Vehicle speed signal		B137	10	0 or 5	0 or 5	"5" and "0" are repeatedly dis- played when vehicle is driven.
Starter switch		B136	20	0	0	Cranking: 8 — 14

Content		Con- nector No.	Terminal No.	Signal (V)		Note
				Ignition SW ON (Engine OFF)	Engine ON (Idling)	
A/C switch		B136	11	ON: 10 — 13 OFF: 0	ON: 13 — 14 OFF: 0	—
Ignition switch		B136	10	10 — 13	13 — 14	—
Neutral position switch	MT	B136	21	ON: 12±0.5 OFF: 0		Switch is ON when gear is in neutral position.
	AT	B136	21	ON: 0 OFF: 12±0.5		Switch is ON when shift is in "N" or "P" position.
Test mode connector		B136	3	5	5	When connected: 0
Knock sensor	Signal	B135	16	2.8	2.8	—
	Shield	B135	27	0	0	—
Back-up power supply		B135	9	10 — 13	13 — 14	Ignition switch "OFF": 10 — 13
Control unit power sup- ply		B135	1	10 — 13	13 — 14	—
		B135	2	10 — 13	13 — 14	—
Sensor power supply		B135	3	5	5	—
Ignition control	#1, #2	B134	33	0	1 — 3.4	Waveform
	#3, #4	B134	32	0	1 — 3.4	Waveform
Fuel injec- tor	#1	B134	34	10 — 13	1 — 14	Waveform
	#2	B134	23	10 — 13	1 — 14	Waveform
	#3	B134	22	10 — 13	1 — 14	Waveform
	#4	B134	8	10 — 13	1 — 14	Waveform
Idle air control solenoid valve	Signal 1	B134	20	—	1 — 13	Waveform
	Signal 2	B134	6	—	1 — 13	Waveform
	Signal 3	B134	5	—	1 — 13	Waveform
	Signal 4	B134	19	—	1 — 13	Waveform
Fuel pump relay control		B134	11	ON: 0.5 or less OFF: 10 — 13	0.5 or less	—
A/C relay control		B134	9	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	—
Radiator main fan relay control		B134	14	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	—
Radiator sub fan relay control		B134	13	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	Models with A/C
Self-shutoff control		B136	12	10 — 13	13 — 14	—
Malfunction indicator light		B134	28	—	—	Light "ON": 1 or less Light "OFF": 10 — 14
Engine speed output		B134	10	—	0 — 13, or more	Waveform
Torque control 1 signal		B136	1	5	5	—
Torque control 2 signal		B136	18	5	5	—
Torque control cut sig- nal		B136	15	8	8	—
Purge control solenoid valve		B134	29	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Air assisted injector solenoid valve		B134	12	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Power steering switch		B136	9	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Fuel tank sensor control valve		B134	1	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 10 — 13	—
Fuel temperature sen- sor		B137	5	2.5 — 3.8	2.5 — 3.8	Ambient temperature: 25°C (75°F)
Fuel level sensor		B135	25	0.12 — 4.75	0.12 — 4.75	—

Content		Connector No.	Terminal No.	Signal (V)		Note
				Ignition SW ON (Engine OFF)	Engine ON (Idling)	
Fuel tank pressure sensor	Signal	B135	26	2.3 — 2.7	2.3 — 2.7	The valve obtained after the fuel filler cap was removed once and recapped.
	Power supply	B135	3	5	5	—
	GND (sensor)	B135	19	0	0	—
Pressure control solenoid valve		B134	4	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Drain valve		B134	3	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
AT diagnosis input signal		B137	19	Less than 1 \longleftrightarrow More than 4	Less than 1 \longleftrightarrow More than 4	Waveform
Small light switch		B137	20	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Blower fan switch		B137	13	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Rear defogger switch		B137	4	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Front oxygen (A/F) sensor signal 1		B136	13	—	2.05 — 2.25	—
Front oxygen (A/F) sensor signal 2		B136	22	—	1.75 — 1.95	—
Front oxygen (A/F) sensor shield		B135	23	0	0	—
Manifold absolute pressure sensor		B135	15	4.0 — 4.8	1.1 — 1.9	—
Intake air temperature sensor		B137	6	3.15 — 3.33	3.15 — 3.33	Intake air temperature: 25°C (75°F)
SSM/GST communication line		B137	16	Less than 1 \longleftrightarrow More than 4	Less than 1 \longleftrightarrow More than 4	—
GND (sensors)		B135	19	0	0	—
GND (injectors)		B134	35	0	0	—
GND (ignition system)		B136	26	0	0	—
GND (power supply)		B134	7	0	0	—
GND (control systems)		B137	14	0	0	—
		B135	21	0	0	—
GND (oxygen sensor heater 1)		B136	5	0	0	—
GND (oxygen sensor heater 2)		B136	16	0	0	—

6. Engine Condition Data

A: ELECTRICAL SPECIFICATION

Content	Specified data
Engine load	1.6 — 2.9 (%): Idling
	6.4 — 12.8 (%): 2,500 rpm racing

Measuring condition:

- After the engine is warmed-up.
- Gear position is in “N” or “P” range.
- A/C is turned OFF.
- All accessory switches are turned OFF.