


D: TRANSMISSION CONTROL MODULE (TCM) I/O SIGNAL

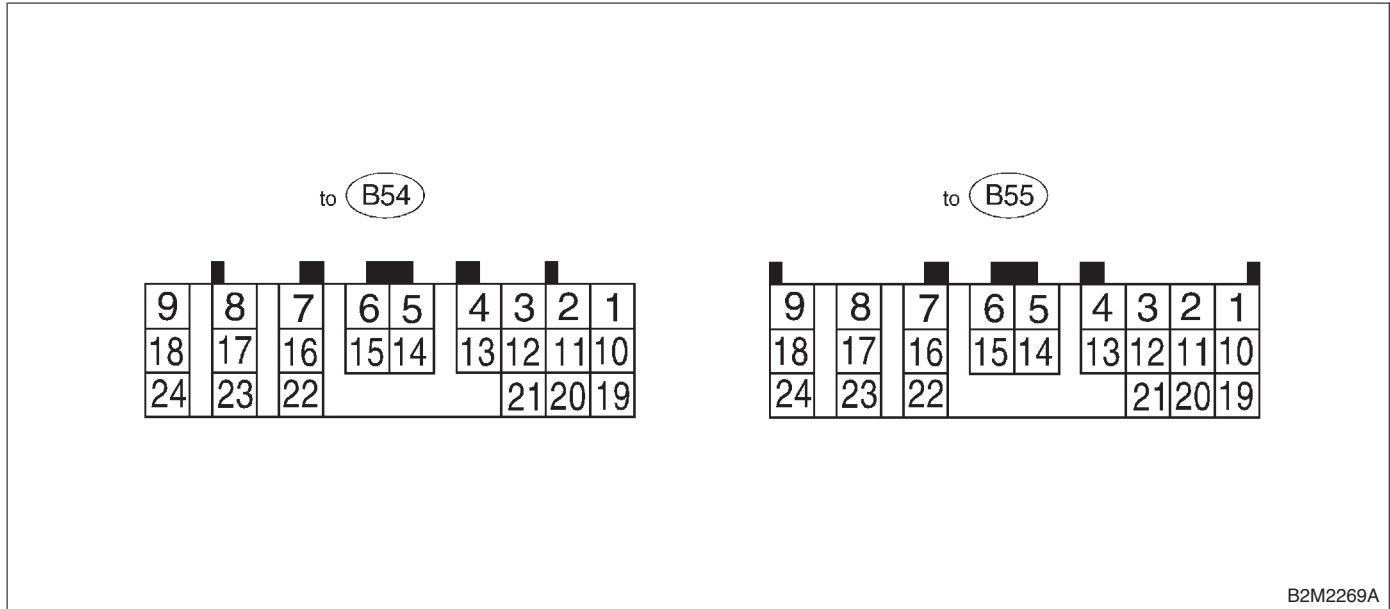

B2M2269A

NOTE:
Check with ignition switch ON.

Content		Connector No.	Terminal No.	Measuring conditions	Voltage (V)
Back-up power supply		B55	6	Ignition switch OFF	10 – 16
Ignition power supply		B54	23	Ignition switch ON (with engine OFF)	10 – 16
		B54	24		
Inhibitor switch	“P” range switch	B55	23	Selector lever in “P” range	Less than 1
				Selector lever in any other than “P” range	More than 8
	“N” range switch	B55	22	Selector lever in “N” range	Less than 1
				Selector lever in any other than “N” range	More than 8
	“R” range switch	B55	17	Selector lever in “R” range	Less than 1
				Selector lever in any other than “R” range	More than 9.5
	“D” range switch	B55	8	Selector lever in “D” range	Less than 1
				Selector lever in any other than “D” range	More than 9.5
	“3” range switch	B55	18	Selector lever in “3” range	Less than 1
				Selector lever in any other than “3” range	More than 9.5
	“2” range switch	B54	10	Selector lever in “2” range	Less than 1
				Selector lever in any other than “2” range	More than 9.5
	“1” range switch	B54	1	Selector lever in “1” range	Less than 1
				Selector lever in any other than “1” range	More than 9.5
Brake switch		B55	24	Brake pedal depressed	More than 10.5
				Brake pedal released	Less than 1
ABS signal		B54	19	ABS switch ON	Less than 1
				ABS switch OFF	More than 6.5

Content	Connector No.	Terminal No.	Measuring conditions	Voltage (V)	Resistance to body (ohms)
Throttle position sensor	B55	1	Throttle fully closed.	0.3 — 0.7	—
			Throttle fully open.	4.3 — 4.9	
Throttle position sensor power supply	B55	2	Ignition switch ON (with engine OFF)	4.8 — 5.3	—
ATF temperature sensor	B55	11	ATF temperature 20°C (68°F)	2.9 — 4.0	2.1 k — 2.9 k
			ATF temperature 80°C (176°F)	1.0 — 1.4	275 — 375
Vehicle speed sensor 1	B55	3	Vehicle stopped.	0	450 — 650
			Vehicle speed at least 20 km/h (12 MPH)	More than 1 (AC range)	
Vehicle speed sensor 2	B55	5	Vehicle speed at most 10 km/h (6 MPH)	Less than 1 ← → More than 4	—
Torque converter turbine speed sensor	B55	12	Vehicle stopped.	0	450 — 650
			Vehicle speed at least 20 km/h (12 MPH)	More than 1 (AC range)	
Vehicle speed output signal	B55	13	Vehicle speed at most 10 km/h (6 MPH)	Less than 1 ← → More than 4	—
Engine speed signal	B55	4	Ignition switch ON (with engine OFF).	More than 10.5	—
			Ignition switch ON (with engine ON).	8 — 11	
Cruise set signal	B54	11	When cruise control is set (SET lamp ON).	Less than 1	—
			When cruise control is not set (SET lamp OFF).	More than 6.5	
Torque control 1 signal	B54	13	Ignition switch ON (with engine ON)	More than 9	—
Torque control 2 signal	B54	21	Ignition switch ON (with engine ON)	More than 9	—
Torque control cut signal	B54	2	Ignition switch ON	8	—
AT load signal	B55	20	Engine idling after warm-up	1.2 — 1.8	—
Shift solenoid 1	B54	7	1st or 4th gear	More than 9	10 — 16
			2nd or 3rd gear	Less than 1	
Shift solenoid 2	B54	6	1st or 2nd gear	More than 9	10 — 16
			3rd or 4th gear	Less than 1	
Line pressure duty solenoid	B54	9	Throttle fully closed (with engine OFF) after warm-up.	1.5 — 4.0	2.0 — 4.5
			Throttle fully open (with engine OFF) after warm-up.	Less than 0.5	
Dropping resistor	B54	18	Throttle fully closed (with engine OFF) after warm-up.	More than 8.5	9 — 15
			Throttle fully open (with engine OFF) after warm-up.	Less than 0.5	
Lock-up duty solenoid	B54	16	When lock up occurs.	More than 8.5	10 — 17
			When lock up is released.	Less than 0.5	
Transfer duty solenoid	B54	15	Fuse on FWD switch	More than 8.5	10 — 17
			Fuse removed from FWD switch (with throttle fully open and with select lever in 1st gear).	Less than 0.5	

Content	Connector No.	Terminal No.	Measuring conditions	Voltage (V)	Resistance to body (ohms)
2-4 brake duty solenoid	B54	8	Throttle fully closed (with engine OFF) after warm-up.	1.5 — 4.0	2.0 — 4.5
			Throttle fully open (with engine OFF) after warm-up.	Less than 0.5	
2-4 brake duty solenoid resistor	B54	17	Throttle fully closed (with engine OFF) after warm-up.	More than 8.5	9 — 15
			Throttle fully open (with engine OFF) after warm-up.	Less than 0.5	
2-4 brake timing solenoid	B54	5	3rd gear	More than 9	10 — 16
			1st gear	Less than 1	
Low clutch timing solenoid	B54	14	2nd gear	Less than 1	10 — 16
			4th gear	More than 9	
Sensor ground line 1	B55	10	—	0	Less than 1
Sensor ground line 2	B55	21	—	0	Less than 1
System ground line	B55	9	—	0	Less than 1
		19			
FWD switch	B55	14	Fuse removed.	6 — 9.1	—
			Fuse installed.	Less than 1	
FWD indicator lamp	B54	12	Fuse on FWD switch	Less than 1	—
			Fuse removed from FWD switch.	More than 9	
Data link signal (Subaru Select Monitor)	B55	7	—	—	—
		16	—	—	
AT diagnosis signal	B54	4	Ignition switch ON	Less than 1 ↔ More than 4	—